



**PHILADELPHIA SOLAR**  
DELIVERING CLEAN ENERGY SOLUTIONS


# NEXUS

**PS-MNB144(HCBF)-xxxW**

Half-Cell N-Type 16BB Bifacial Module

**580 - 600 Watt**

Positive power tolerance of 0 ~+3%

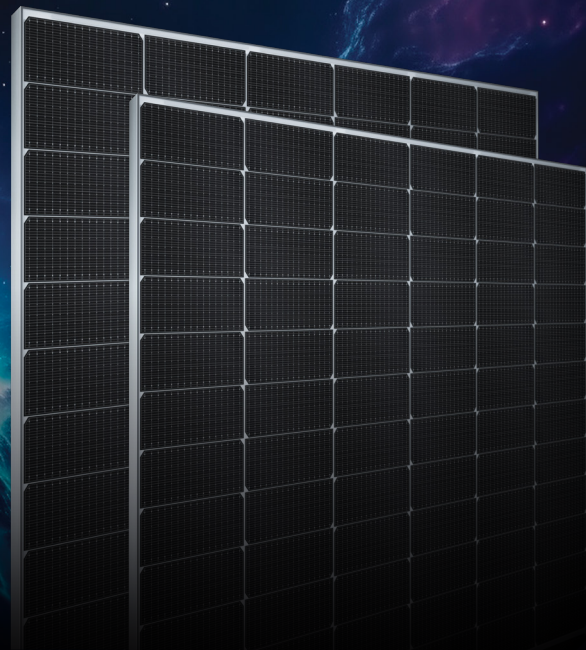

Philadelphia Solar's Mono-Crystal-line N-type modules with power up to **600Wp** are produced using the state-of-the-art (automated) robotic production lines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions

## CERTIFICATIONS

UL 61215 / UL 61730  
IEC 61215 / IEC 61730  
CSA C22.2#61730:2019  
HALT TEST Highly Accelerated Life And Extended Reliability Test  
IEC 61853 PAN File  
IEC TS 62804 PID Resistance  
IEC 60068 Dust and Sand Resistance  
IEC 62716 Ammonia Resistance  
IEC 61701 Salt Mist Resistance  
Bankability Report  
EN ISO 9001: 2015  
Quality Management System  
EN ISO 14001: 2015  
Environmental Management System  
EN ISO 45001: 2018  
Occupational health and safety management systems



Intertek



## APPLICATIONS



On-Grid Commercial/  
Industrial Roof-Tops



Off-Grid Systems  
(Including Lighting Systems)



Solar Power Plants

## FEATURES



Power output increases by 5-25% from the backside resulting in significantly reduced LCOE and (IRR).



withstand High Mechanical load :  
Front (5400 Pascal)  
Back (2400 Pascal)



Exceptional Anti-PID performance through the use of optimized mass-production processes and strict materials control.



Improved light trapping and current collection technology enhance module power output and reliability.



Less partial shading current mismatch loss so more power output.




Better temperature coefficients come from half-cell design.



Made In Jordan

## LINEAR PERFORMANCE WARRANTY

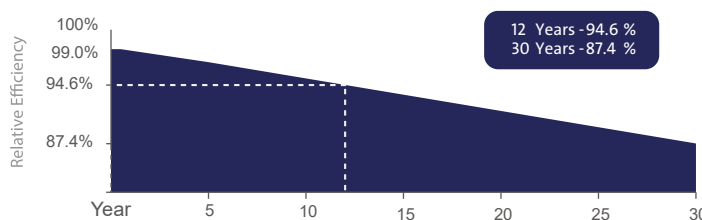

12 Year Product Warranty




30 Year Linear Power Warranty




Only **-0.4%** Annual Degradation

## Electrical Performance & Temperature Dependence

Current-Voltage & Power-Voltage Curves (600W)

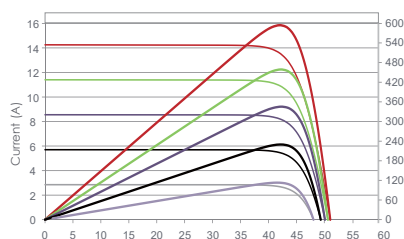

Temperature Dependence of  $I_{sc}$ ,  $V_{oc}$ ,  $P_{max}$

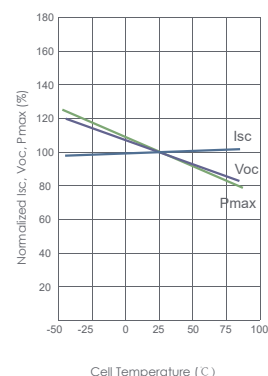

ELECTRICAL CHARACTERISTICS


| POWER AT STC                     | 580 W       | 585W   | 590W   | 595 W  | 600W   |
|----------------------------------|-------------|--------|--------|--------|--------|
| Short Circuit Current - Isc (A)  | 14.10       | 14.14  | 14.18  | 14.22  | 14.26  |
| Maximum Power Current - Impp (A) | 13.33       | 13.37  | 13.41  | 13.44  | 13.47  |
| Open Circuit Voltage - Voc (V)   | 51.65       | 51.79  | 51.93  | 52.07  | 52.21  |
| Maximum Power Voltage - Vmpp (V) | 43.64       | 43.89  | 44.14  | 44.34  | 44.57  |
| Module Efficiency - $\eta$ ' (%) | 22.45%      | 22.65% | 22.84% | 23.03% | 23.23% |
| Bifaciality Ratio (%)            | 80% $\pm$ 5 |        |        |        |        |
| Power tolerance (%)              | 0~+3%       |        |        |        |        |

Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000 W/m<sup>2</sup> , Cell Temperature 25° C).



MATERIAL CHARACTERISTICS

MODULE DRAWINGS

| Characteristics     | Value                                   |
|---------------------|-----------------------------------------|
| Cells per Module    | 144 (72 x 2)                            |
| Cell Type           | N Type Mono-Crystalline                 |
| Front Surface       | 3.2mm Tempered AR Coated Glass          |
| Back Cover          | Transparent Backsheet                   |
| Frame               | Anodized Aluminum (Black/Silver)        |
| Junction Box        | IP 68 With Original MC4                 |
| Cable Length        | 1200mm Cable length could be customized |
| Fire Classification | Type 1                                  |

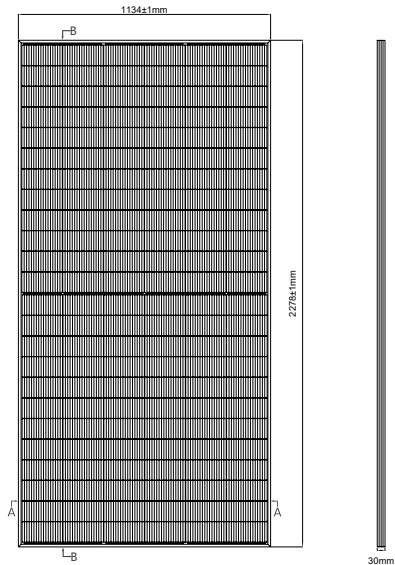

| THERMAL CHARACTERISTICS                                  |                                   | PHYSICAL CHARACTERISTICS    |                  |
|----------------------------------------------------------|-----------------------------------|-----------------------------|------------------|
| Characteristics                                          | Value                             | Characteristics             | Value            |
| Open Voltage Temperature Coefficient VOC (%/C°)          | -0.25                             | Module Dimensions (mm)      | 2278 x 1134 x 30 |
| Short Circuit Current Temperature Coefficient ISC (%/C°) | +0.045                            | Module Weight (kg)          | 27 $\pm$ 1 Kg    |
| Power Temperature Coefficient PMP (%/C°)                 | -0.29                             | <b>Packaging</b>            | <b>Value</b>     |
| NOCT (°C)                                                | 45 $\pm$ 2                        | Modules per Pallet          | 36               |
| <b>OPERATING CONDITIONS</b>                              |                                   | 40 Feet High-Cube Container | 720 Modules      |
| Maximum System Voltage - Vmax (V)                        | 1500                              | <b>Mechanical Load**</b>    | <b>Value</b>     |
| Maximum Series Fuse (A)                                  | 30                                | Max Static load (Front)     | 5400 Pa          |
| Operating Temperature Range (°C)                         | IEC: -40 to +85<br>UL: -40 to +90 | Max Static load (Back)      | 2400 Pa          |
|                                                          |                                   | Dynamic load                | 1000 Pa          |

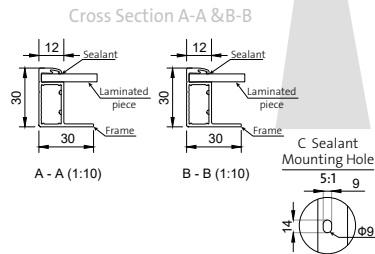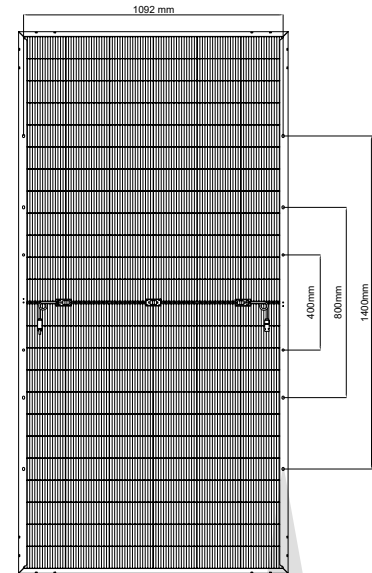

- ◆ Tolerance of power Current and Voltage (ISC,VOC)  $\pm$ 3 %
- ◆ Datasheet is subjected to change without prior notice, always obtain the most recent version of the datasheet.
- ◆ \*\* Caution: For professional use only, the installation and handling of PV modules and cleaning modules require professional skills and should only be performed by qualified professionals, please read the Installation and Operation Manual before using the modules, also Cleaning Guidelines